Movinord





SIZE	Natural	Rose	Chestnut Mahogany	Walnut	Charcoal	Vanilla
Solid plank flooring						
19.05x107.95x3001845 mm	V	V	\checkmark	V	V	V
19.05x127x3001845 mm		V	V	V	 	V
2-layer engineered T&G flooring						
12.7x107.95x3001845 mm	V	V	V	V	V	V
3-layer single strip flooring CosLoc 5G						
15x127x3001845 mm	V	V	V	V	V	V
15x160x4001845 mm		V	V	V		V

Wood species: Oak

Grade: Select & Better

Finish: Lacquer CosNanoTech+

Cos Nano Jech Plus

Sheen: Semigloss

Finish Warranty: 25 years







Coswick Classic Oak Collection opens a world of opportunities to be artistic about your living space. Seven elegant colors that span from sophisticated oak Charcoal to graceful oak Vanilla allow you to create a unique atmosphere in your home. Classic Oak Collection is available as solid hardwood flooring, 2-layer engineered tongue and groove flooring and 3-layer engineered single strip CosLoc flooring.





SIZE	-	Caramel	Avalanche	Мосса	Moonlight	Wenge	Cloudy	French Riviera	Coffee Beans
2-layer engineered T&G flooring									
12.7x107.95x3001845 mm		V	V	V	V	V		V	V
3-layer single strip flooring CosLoc 5G									
15x127x3001845 mm	-	V	V	V	V	V	V	V	V

Wood species: Ash

Grade: Select & Better, 1 Common

Finish: Lacquer, Silk Oil

Cos Nano Jech Pris Silk Oil

Sheen: Semigloss, Silk Matte Finish Warranty: 25 years Structural Warranty: Lifetime







Coswick Classic Ash Collection features strikingly stunning flooring that is distinguished by consistent color, clarity and exquisite prominent grain pattern. This collection is available in two surface finishes: semigloss lacquer (Avalanche, Wenge, Moonlight) and matte silk oil (Caramel, Mocca, Moonlight, Cloudy, French Riviera, Coffee Beans). Classic Ash Collection is offered as 2-layer engineered tongue and groove flooring and 3-layer engineered single strip CosLoc flooring.





SIZE	Rose	Chestnut	Walnut	Vanilla
Solid plank flooring				
19.05x107.95x3001845 mm	V	V	V	V

Wood species: Oak

Grade: Quarter Sawn Select & Better Finish: Lacquer CosNanoTech+




Sheen: Semigloss

Finish Warranty: 25 years Structural Warranty: Lifetime







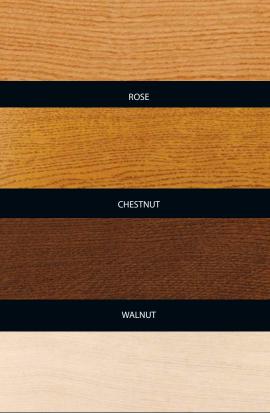

VANILLA

Coswick Quarter Sawn Collection offers exquisite prefinished flooring for your high-end design projects. The most remarkable feature of quarter sawn oak flooring is its exceptional grain pattern. In contrast to plain sawn flooring that is characterized by heavy grain, quarter sawn oak has delicate vertical grain with shiny reflective surface flecks. Quarter sawn flooring is highly rated for its dimensional stability. It wears slower and more evenly than traditional plain sawn flooring and does not surface check or split. Increased stability of quarter sawn flooring means that it stays flat and free from gaps through all seasons.



SIZE	Natural	Chestnut	Chabaud	Walnut	Dark Chocolate	Antique White	Gothic	White Frost	Grey Cashmere
Solid plank flooring									
19.05x107.95x3001845 mm	V	V	✓	V		V	V	V	V
19.05x127x3001845 mm		V	V	V	:	V		V	V
2-layer engineered T&G flooring									
12.7x107.95x3001845 mm	V	V	V	V	V	V	V	V	
3-layer single strip flooring CosLoc 5G									
15x127x3001845 mm	V	V	V	V	V	V	V	V	
15x160x4001845 mm				V		V	V	V	

Wood species: Oak


Grade: Select & Better

Finish: Silk Oil

Silk-Oil

Sheen: Silk Matte



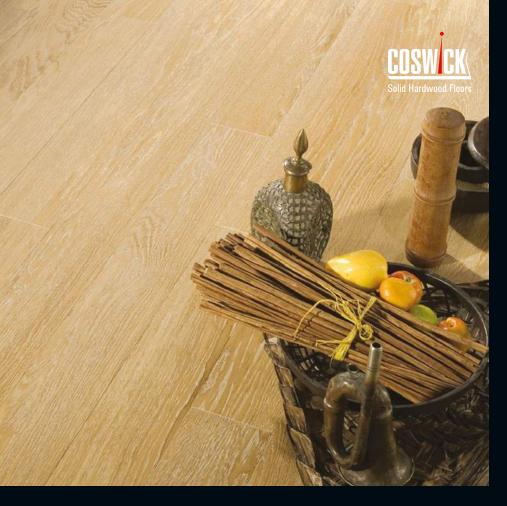

Brushed & Oiled Oak Collection is designed to highlight natural richness and uniqueness of white oak. Soft portion of the wood is wire brushed away to expose deep textured grain that is complemented by beautiful knots and dramatic oak character marks. Aged look of brushed and oiled oak flooring is completed by Silk Oil coating. Unlike traditional polyurethane finish that creates a strong protective film on the floor surface, oil finish penetrates the wood, preserving its natural look, feel and warmth. Brushed & Oiled Oak Collection is available as solid hardwood flooring, 2-layer engineered tongue and groove flooring, and 3-layer engineered single strip CosLoc flooring.





SIZE		Natural	Chestnut	Walnut	Antique White	Terracotta	French Estate	Chamboard	Milk Chocolate	Amber	Muscat
Solid plank flooring											
19.05x107.95x3001845 mm	1	V	V	V	V	V	V	V	 	V	V
19.05x127x3001845 mm	1	V	V	V	V	V	V	V	 - -	V	V
2-layer engineered T&G flooring											
12.7x107.95x3001845 mm		V	V	V	V	V	V	V	V		-
3-layer single strip flooring CosLo	c 50	G									
15x127x3001845 mm		V	V	V	V	V	V	V	V		
15x160x4001845 mm	-	V	V	V	V	V	V		! !	 	-

Wood species: Oak

Grade: 1 Common, Tavern,

Taver 2

Finish: Silk Oil

SilkOil

Sheen: Silk Matte





Country Oak Collection reflects nature's unique textures and colors. Natural contrasts created by bold color variation, beautiful knots and dramatic character marks define this flooring collection. The result is a beautifully aged or "antique" looking floor. Floors in Country Oak Collection are available as solid hardwood, 2-layer engineered tongue-and-groove, and 3-layer engineered single strip CosLoc 5G flooring.





SIZE	Sandy	Stoney Creek	Chamboard	Nord Sea	Dark Chocolate	Charcoal	Albatross
3-layer single strip flooring CosLoc 5G							
15x127x3001845 mm	V	V	V	V	V	V	V

Wood species: Oak Grade: Select & Better

Finish: Lacquer CosNanoTech+ Matte




Sheen: Matte

Finish Warranty: 25 years Structural Warranty: Lifetime






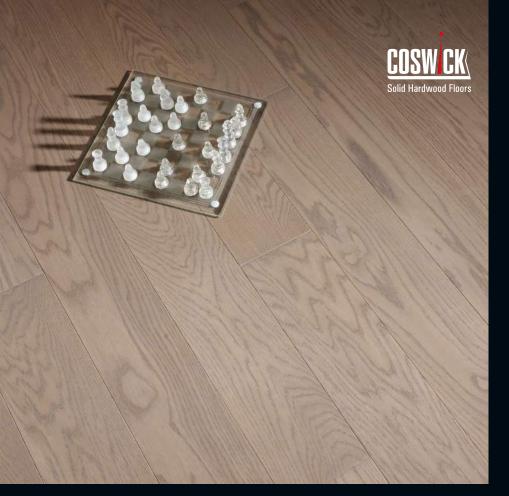

Coswick Signature collection of engineered oak flooring is inspired by the element of water in all its forms. Seven designer colors of this collection recall the warmth of sandy beaches, coziness of stoney forest creeks, might and beauty of the North Sea. The natural color tones that range from light and soft greys to deep and earthly browns create unique and stunning interiors.

In Signature Oak collection, color is used to emphasize the natural wood texture of oak. All floors of this collection come prefinished with a lacquer matte finish.

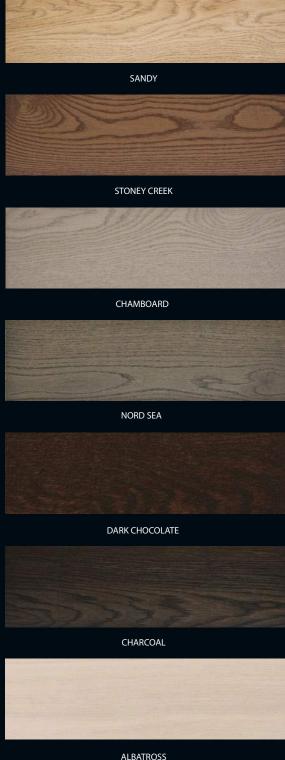



SIZE		Moonlight	Silve	ry	Pearl Grey	Cappuccino	Tiger Eye	Como	Black Emerald
2-layer engineered T&G flooring									
12.7x107.95x3001845 mm		V	V		V	V	V	V	V
3-layer single strip flooring CosLoc 5G									
15x127x3001845 mm	TI I	V	V		V	V	V	V	V

Wood species: Ash Grade: Select & Better

Finish: Lacquer CosNanoTech+ Matte

Cos Nano Tech Plus Finish Technology matte

Sheen: Matte

Finish Warranty: 25 years Structural Warranty: Lifetime







Coswick Signature Ash Collection features seven designer colors. Any one of them, be it delicate Moonlight, extravagant Como or refined Black Emerald, will add a signature style to any home, office or condo. Signature Ash Collection is available as 2-layer engineered tongue-and-groove flooring and 3-layer engineered single strip CosLoc flooring.





SIZE	P	Pastel	(Grey Cashmere		White Marble	İ	Antique Patina	 French Gobelin	-	Terra	Graph	nite
Solid plank flooring													
19.05x127x3001845 mm		V		V		V		V	 V	-	V	V	
3-layer single strip flooring CosLoc 5G													
15x127x3001845 mm		V		V		V	-	V	 V		V	V	

Wood species: Oak

Grade: 1 Common, Tavern

Finish: Silk Oil Silk•Oil

Sheen: Silk Matte





Tradition is what binds the past, present and future. It transcends the ordinary, giving us a sense of continuity and belonging, shaping our world view through storytelling, mythology, art, and family relics that are passed down through generations. Tradition – our heritage – is a belief in one's past and one's future. Together, tradition, heritage and modernity hold us up, allowing to exist fully and totally.

The desire to weave together tradition and innovation inspired the creation of Coswick Heritage Collection. Produced by using bi-color technology, the four designer floors that make up the new line bring out the inherent beauty of natural oak. Available as solid and 3-layer CosLoc 5G floating engineered flooring, Heritage Collection will be a beautiful, elegant addition to any type of interior.



PASTEL



GREY CASHMERE



WHITE MARBLE




ANTIQUE PATINA



FRENCH GOBELIN



TERRA





SIZE	American Walnut S&B Lacquer	American Walnut Traditional Lacquer	American Walnut Classic, Natur Lacquer, Silk Oil, Hardwax Oil	Jatoba S&B Silk Oil	Mahogany S&B Silk Oil
2-layer engineered T&G flooring					
12.7x107.95x3001845 mm	V	V	V	V	V
3-layer single strip flooring CosLoc 5G					
15x127x3001845 mm	V	V	V	V	V
15x160x4001845 mm	V	V	V	V	V

Wood species: American Walnut, Jatoba, Santos mahogany

Grade: Select & Better, Traditional, Natur Finish: Lacquer, Silk Oil, Hardwax Oil

Cos Nano Sectivities Silk Oil Hard Wax Oil is

 ${\it Sheen: Semigloss, Silk\ Matte, Matte}$

Finish Warranty: 25 years Structural Warranty: Lifetime







Coswick Exotic collection features flooring manufactured from American Walnut, Jatoba (Brazilian Cherry) and Santos Mahogany. Wood of these exotic species has original structure, depth of texture and colour. The resulting floor has a captivating earthly look and a very warm feel. Exotic Collection is available as 2-layer engineered tongue and groove flooring, and 3-layer engineered single strip CosLoc flooring.









EUROPEAN LINE OF WOOD FLOORING

Coswick Collection of wide plank flooring was inspired by simple forms and authentic styles that defined European Arts&Crafts Design movement at the turn of XXth century.

Two collections "Arts&Crtafts" and "Norwegian Wood" make up Coswick European Line. Al floors are distinguished by plank width 190mm and fixed or random length up to 2100mm. Innovative 3-layer CosLOc 5G flooring technology ensures superb dimensional stability even in conditions of significant moisture and temperature fluctuations.

European Line floors come with factory applied natural eco-friendly HardWax Oil finish. HardWax Oil applied to gently brushed planks' surface highlights natural beauty of wood making floors warm and pleasant to touch.



SIZE	Vienna	Batiste	Geneva	Marseille	Old Venice	London	Barcelona
3-layer single strip flooring CosLoc 5G							
15x190x2100 mm	V	V	V	V	V	V	V

Wood species: Oak Grade: Character

Finish: Hardwax Oil

Hard Wax Oil

Sheen: Matte





Coswick collection of wide plank flooring was inspired by simple forms and authentic styles that defined European Arts and Crafts Design movement at the turn of the XXth century.

Arts & Crafts collection features 7 distinct designer floors. All floors have plank width of 190mm and fixed length of 2100mm. Innovative 3-layer CosLoc 5G flooring technology ensures superb dimensional stability in conditions of significant moisture and temperature fluctuations.

All floors from the Arts & Crafts collection come with factory applied Hardwax Oil finish.



BARCELONA



SIZE	Albion	Stonehenge	Heather	Scandinavian	Polar Night	Bluish-grey Moss	Wood agate	Bergen
3-layer single strip flooring CosLoc 5G								
15x190x6002080 mm	V	V	V	V	V	V	V	V
15x190x2100 mm	V	V	V	V	V	V	V	V

Wood species: Oak Grade: Character

Finish: Hardwax Oil

Hard Wax Oil

Sheen: Matte





Norwegian Wood flooring collection is a natural addition to Coswick line of wide-plank hardwood floors. Like Arts & Crafts collection, Norwegian Wood floors feature only natural materials and emphasize authentic beauty of wood through use of subtle, earthly color tones and gentle wire brushing of the wood surface.

All floors in Norwegian Wood collection come with factory-applied Hardwax Oil finish, an innovative combination of environmentally-friendly eco-waxes and oils that protect the flooring surface from ill effects of dirt and moisture, while preserving and even emphasizing natural wood texture









MOSAIC AND UNIBLOCK FLOORING

MOSAIC WOOD FLOORS:

Versailles Triar

Trianon

Langeais

Cheverny









HERRINGBONE







UNIBLOCK FLOORING







ZEBRANO FLOORING







SIZE	Natural	Barcelona	Marseille	Old Venice	Neapolis	Verona	Classic
Mosaic flooring							
19.05x635x635 mm, Oak Top layer 8 mm	V	V	V	V		1	i !
19.05x635x635 mm, Ash Top layer 8 mm			! !	1	V	V	
19.05x635x635 mm, American Walnut Top layer 8 mm	V						V

Wood species: Oak, Ash, American Walnut

Grade: Select & Better,

Quarter Sawn Select & Better

Finish: Hardwax Oil Combi

Hard Wax Oil combi

Sheen: Matte





Named after the palace of Versailles, where parquet floors originated in 1600s, this unique mosaic floor pattern recalls and captures the timeless design, refinement and luxury enjoyed by the French Kings, and brings the spirit of the past into the present day.

Coswick Versailles flooring pattern is available in Oak, Ash, and American walnut, and comes in 6 designer colors that were carefully selected for this collection to communicate the the depth and the spirit of the original Versailles floors.







AMERICAN WALNUT CLASSIC



SIZE	Natural	Barcelona	Old Venice	Classic
Mosaic flooring				
19.05x635x635 mm, Oak Top layer 8 mm	V	V	V	
19.05x635x635 mm, American Walnut Top layer 8 mm	V		 	V
19.05x635x635 mm, American Walnut Oak Top layer 8 mm	V			

Wood species: Oak, American Walnut

Grade: Select & Better
Finish: Hardwax Oil Combi
Hard Wax: Oil combi

Sheen: Matte













OAK NATURAL

OAK OLD VENICE





OAK BARCELONA

AMERICAN WALNUT NATURAL





AMERICAN WALNUT CLASSIC

OAK • AMERICAN WALNUT NATURAL

Overlooking the Loire valley, Château de Langeais is the oldest stone castle in France. Changing epochs and architectural styles have all left their unique footprints inside the castle walls. Only the exquisite taste of its residents and architects remained unchanged.

Refined mosaics that decorate the floors of Château de Langeais weave together complex geometric patterns with the symbols of local ruling families. A walk through the halls of Langeais is much like a walk back through history.



SIZE	Natural	Barcelona	Old Venice	Classic
Mosaic flooring				
19.05x635x635 mm, Oak Top layer 8 mm	V	V	V	
19.05x635x635 mm, American Walnut Top layer 8 mm	V		1	V
19.05x635x635 mm, American Walnut Oak Top layer 8 mm	V			

Wood species: Oak, American Walnut

Grade: Select & Better Finish: Hardwax Oil Combi 'Hard Wax-Oil comb

Sheen: Matte













OAK BARCELONA







AMERICAN WALNUT CLASSIC

OAK • AMERICAN WALNUT NATURAL

Château de Cheverny is known for the simple beauty and style of its interiors that have remained nearly unchanged over the centuries. The same deep reverence for customs and traditions inspired Cheverny line of mosaic wood floors by Coswick.

Cheverny flooring pattern closely replicates the intricate, interwoven designs of the handcrafted wooden floors of the Chateau.



SIZE	Rose	Chestnut	Terracotta	Antique White	Chamboard	Natural	Classic
2-layer engineered T&G flooring							
12.7x107.95x647.7 mm, Oak	—	V	✓	V	V		
12.7x107.95x647.7 mm, American Walnut				!		V	V



Wood species: Oak, American Walnut Grade: Select & Better, 1 Common, Tavern Finish: Lacquer, Silk Oil

Cos Nano Tech Pris Silk Oil

Sheen: Semigloss, Silk Matte Finish Warranty: 25 years Structural Warranty: Lifetime







Renaissance collection is a modern take on a classic flooring style. This collection features flooring from oak and American walnut, and is available in seven designer styles. Renaissance flooring planks have a fixed length, which allows them to be installed in a wide range of patterns and create any desired effect. Lay hardwood flooring in square modules for checkerboard effect, or use herringbone designs to recall the traditional look of luxurious homes of Old Europe. Manufactured as 2-layer engineered hardwood, flooring from Renaissance collection is of superb dimensional stability, which is why it can be safely installed into any geometric pattern.



AMERICAN WALNUT • CLASSIC



SIZE	Natural	Pastel	Chamboard	Milk Chocolate	Pearl Grey	Moonlight	French Riviera
2-layer engineered T&G flooring							
12.7x107.95x530 mm, Oak	 V	V	V	V			
12.7x107.95x530 mm, Ash				! ! !	V	V	V
12.7x107.95x530 mm, American Walnut	 V		!	!	1		



Wood species: Oak, Ash, American Walnut Grade: Select & Better, 1 Common Finish: Lacquer, Silk Oil

Cos Nano Jech Pris Silk Oil

Sheen: Semigloss, Silk Matte Finish Warranty: 25 years Structural Warranty: Lifetime





Chevron flooring pattern originated in 17th century France, where it quickly became one of the most preferred types of floors in the palaces of the kings and nobility alike. The main difference between chevron and herringbone patterns – minimal, as it may seem at first – makes for a visually rich, sophisticated design. While both chevron and herringbone floors are laid out in zig-zag pattern, chevron planks are cut to ensure that each "zig" and "zag" are connected at a 45 degree angle. For this reason, each set of chevron floors includes both right and left elements.

Coswick Chevron parquet flooring is a modern, technologically superior take on the traditional French floor. Manufactured using cutting-edge equipment, each plank is milled to precision.





SIZE	-	Natural		Rose	Ches	tnut	-	Milk Chocolate	Avalanche	Moonlight	Como	Pearl Grey
Solid plank flooring												
19.05x228.6x228.6 mm, 4 bars, 0ak		V	-	V	\		-	V	 		 	
19.05x228.6x228.6 mm, 5 bars, Oak				V	\						i !	
19.05x228.6x228.6 mm, 6 bars, 0ak		V	-	V	>			V	 - - -	 	 	
19.05x228.6x228.6 mm, 4 bars, Ash	-		-						V	V	V	V







Grade: Select & Better, 1 Common Finish: Lacquer, Silk Oil

Wood species: Oak, Ash





Sheen: Semigloss, Silk Matte Finish Warranty: 25 years Structural Warranty: Lifetime







Coswick Uniblock Collection consists of specialty oak and ash flooring that is perfect for any home, apartment or condo. Uniblock flooring comes in preassembled blocks of 4, 5 and 6 bars and is available in eight classic colors. Uniblock flooring requires easy glue down installation over concrete or wood subfloor.





SIZE	N	atural
3-layer single strip flooring CosLoc 5G		
15x160x4001450 mm, Oak	,	/
15x160x4001450 mm, Ash	,	/
- tuanne		

Sheen: Matte

Wood species: Oak, Ash Grade: Select & Better


Finish: Hardwax Oil Hard Wax Oil &

Structural Warranty: Lifetime





"Zebrano" collection decors go in line with current trends towards Natural. Linear pattern is a main distinctive feature of the collection. Simple design made up by adjusted in the top layer wood strips from oak or ash brings in the effect of an exclusive material looking like continuous canvas. Exceptional dimensional stability is ensured by 3-layer CosLoc 5G flooring technology. All Zebrano floors come with factory applied natural HardWax Oil finish.



ASH • NATURAL







WOOD WALL PANELS

Wood wall panels are widely used for finishing walls, ceilings and other elements of interior. Wall panels allow to significantly expand the spectrum of interior design solutions that call for use of natural, eco-friendly materials.

Coswick wall panels are manufactured from Oak, American walnut and Birch. Three-layer engineered tongue-and-groove technology ensures superb structural balance and dimensional stability of all wall panels.

Coswick wall panels come with factory appied Hardwax Oil Combi finish, innovative finish derived from natural ingredients. The top finish layer contains specialty UV-cured oils that strengthen the wood panels and protect them from surface damages.





SIZE	Natural	Vanilla	Cashmere	Stony Creek
3-layer T&G Wood Wall Panel				
14x190x9002800 mm, Oak	V	V	V	
14x190x2900 mm, Oak	V	V	V	
14x190x9002800 mm, Birch				V
14x190x2900 mm, Birch				V
14x190x6002400 mm, American Walnut	V			

Wood species: Oak, Birch, American Walnut

Finish: Hardwax Oil Combi

Hard Wax Oil combi

Sheen: Matte

Structural Warranty: Lifetime





Coswick wall panels are manufactured from Oak, American walnut and Birch. Three-layer engineered tongue-and-groove technology ensures superb structural balance and dimensional stability of all wall panels. Coswick wall panels come with factory applied Hardwax Oil Combi finish, innovative finish derived from natural ingredients. The top finish layer contains specialty UV-cured oils that strengthen the wood panels and protect them from surface damages.



NATURAL • AMERICAN WALNUT

TECHNOLOGY

Solid hardwood flooring T&G



PRODUCT USE

Solid hardwood flooring should be installed on or above grade. Nail or staple down installation over wooden subfloor.

CONSTRUCTION

100% solid hardwood. Wear layer is 7 mm thick and can be sanded up to 6 times. Solid flooring boards enhance structural stability of the floor.

DIMENSIONS

Thickness: 19.05 mm Width: 82.55, 107.95, 127mm Length: 300-1845 mm

Tongue-and-groove profile. Microbevel on all 4 sides.



FEATURES

Coswick solid hardwood flooring is a 100% natural product. Solid wood floors provide exceptional sound and thermo insulation. Beautiful grain texture of natural wood brings a sense of warmth and authenticity to any space. Coswick solid hardwood floors come with a lifetime structural warranty.





PROPERTIES

Solid hardwood flooring is 100% natural product that responds to air humidity variations. During warm and humid summers, it is not unusual for wood to expand. Winters and dry climates can cause wood to contract. In order to avoid noticeable movements in your floors, relative indoor humidity level should be kept at 45-55% throughout the year.

INSTALLATION METHODS

Installation is fast and easy. Planks need to be nailed or stapled down over wooden subfloor.



2-layer engineered flooring T&G



PRODUCT USE

2-layer engineered flooring can be installed above, on or below grade. Nail down over wooden subfloor; or glue down over concrete or wooden subfloor, sound membrane. 2-layer flooring with Silk Oil finish can be installed over radiant heat system.



CONSTRUCTION

Top wear layer is 4 mm thick and can be sanded up to 4 times. Coswick uses only sawn lamellas for top layer. Sawn hardwood veneers have no internal checks that might cause face splits in lamella later on. Sawn hardwood lamellas are 100% solid wood and preserve the rich grain texture appearance. Plywood core consists of 7 cross-layers of birch.

DIMENSIONS

Thickness: 12.7 mm Width: 107.95 mm Length: 300-1845 mm

Tongue-and-groove profile. Microbevel on all 4 sides.



FEATURES

High-adhesion polyurethane glues are used to bond top hardwood veneer to plywood base. Extra strong bonding ensures that no delamination occurs even under elevated moisture conditions. Coswick polyurethane adhesives are 100% formaldehyde free and are environmentally friendly.





PROPERTIES

Coswick 2-layer engineered T&G hardwood floors have minimal movement and maintain superb dimensional stability through seasonal humidity fluctuations.

INSTALLATION METHODS

To install, glue down over concrete, plywood or wooden subfloor or sound membrane. Arternatively, nail down over wooden subfloor.



3-layer engineered single strip CosLoc



PRODUCT USE

Floating installation over concrete or wooden subfloor. Can be installed above, on or below grade. 3-layer flooring with Silk Oil or Hardwax Oil finish can be installed over radiant heat system.



Top wear layer is 4 mm thick and can be sanded up to 4 times. Coswick uses only sawn lamellas for top layer. Sawn hardwood veneers have no internal checks that could cause face splits in lamella later on. Sawn hardwood lamellas are 100% solid wood and preserve the rich grain texture appearance. Middle layer is made of cross-laid interconnected solid birch bars. Thickness of the middle layer is 8 mm. Cork compensators are added every 15 cm to help to balance internal stress, increase dimensional stability of the plank and eliminate squeaking in floors. Bottom layer is 3 mm solid birch sawn lamella.

DIMENSIONS

Thickness: 15 mm

Width: 127 mm & Length: from 300 to 1845 mm Width: 160 mm & Length: from 400 to 1845 mm

Width: 190 mm & Length: 2100 mm

CosLoc 5G locking system is licensed by Valinge Innovation (Sweden).

Microbevel on all 4 sides.

FEATURES

High-adhesion polyurethane glues are used to bond top hardwood veneer to plywood base. Extra strong bonding ensures that no delamination occurs even under elevated moisture onditions. Coswick polyurethane adhesives are 100% formaldehyde free and are environmentally friendly.







PROPERTIES

Coswick uses solid birch for middle and bottom layers instead of traditional softwood. This helps to enhance internal balance of hardwood planks and reduce possibility of twisting or warping. Additionally, solid middle layer greatly improves thermo- and sound insulating properties of engineered flooring.



3-layer engineered single strip CosLoc flooring is floated over subfloor or underlayment. Planks do not need to be glued down, nailed or stapled. Single Cosloc strips are interlocked on all 4 sides. If needed, installed Cosloc floors can be taken apart and re-installed elsewhere.





Janka hardness

In woodworking and hardwood flooring manufacturing, different wood species are compared to one another using the Janka method. Janka is a test which measures (in pounds) the force required to drive a metal ball (11.28 mm in diameter) into the wood to the depth of ½ the ball's diameter. The hardness of a given wood species is directly proportional to its Janka value: the higher the value, the higher the wood hardness.

Janka hardness test is calculated as an average between plain sawn and quarter sawn cuts and is meant to inform about structural properties of a given wood species, its resistance and durability. The table below shows how wood species used to manufacture Coswick flooring compare against one another according to Janka scale.



FINISHING SYSTEMS

LACQUER FINISH



FINISH TECHNOLOGY

CosNanoTech+ finishing technology provides exceptional protection for your hardwood floors. CosNanoTech+ finish is composed of 12 coats of top quality sealers and compounds with aluminum oxide for extra durability. Crosslinked nano particles are used to increase finish elasticity and maintain high wear resistance. Coswick CosNanoTech+ finish has 25-year warranty.

FFATURES

Clarity. Finished surface is clear and transparent. All you see is wood in its natural beauty. Smoothness. Finished surface is very smooth to touch.

Durability. Innovative CosNanoTech+ finish is 10 times more wear-resistant than traditional urethane finishes. Coswick CosNanoTech+ prefinished floors are covered by 25-year finish wear warranty.

ECOLOGY

Environmentally friendly. CosNanoTech+ prefinished solid hardwood floors have zero VOC emissions.

Antibacterial Shield. CosNanoTech+ finish serves as a shield that prevents bacteria and mildew from multiplying on floor surface.

CARE AND MAINTENANCE

Easy care and maintenance. Sweeping or light vacuuming is all that is required for regular maintenance. Use Coswick Service Kit to clean and extend the life of your hardwood floor.

SILK OIL



FINISH TECHNOLOGY

Innovative Silk Oil protective finish consists of 4 coats of deep penetrating UV-Oil. Oil finished flooring feels warm and smooth under your feet, it does not show dents and scratches as much as other finishes do. Silk Oil floor is very easy to maintain and restore.

FEATURES

Smoothness. UV-Oil finished floors feel warm and silky smooth under your feet. Walking barefoot on oiled floors feels incredible!

Universal use: Coswick Silk UV-Oil floors are recommended for residential as well as commercial use. Water repellent properties of UV-Oil finish make oiled flooring the perfect choice for lakeside cottages, bars and restaurants.

UV-Oil is very forgiving. Because the finish is matte, small scratches and dents will not be visible on the floor surface, but will blend in with the natural wood grain texture.

ECOLOGY

Environmentally friendly. Silk Oil prefinished solid hardwood floors have zero VOC emissions.

Antibacterial Shield. Silk Oil finish serves as a shield that prevents bacteria and mildew from multiplying on floor surface.

CARE AND MAINTENANCE

Easy restoration and repair. If cared for correctly, oiled flooring will never need to be fully sanded and refinished. Depending on the amount of traffic, your Coswick UV-Oil floors will need to be re-oiled every few years. Coswick recovery oil can be applied directly over the old finish.

Easy care and maintenance. Sweeping or light vacuuming is all that is required for regular maintenance. Use Coswick Service Kit to clean and extend the life of your hardwood floor.

HARDWAX OIL

Hardwax Oil is an innovative hardwood flooring finish that consists of 3 layers of wax oil produced from natural components. Among the main ingredients of Hardwax Oil are organic oil, wax, and other natural components.

In Hardwax Oil finish, oil easily penetrates into wood pores, deeply saturating the wood, strengthening and protecting it from ill effects of moisture, dirt etc. Waxes create a hard protective film on the wood surface. Aside from moisture defense, they protect the floor surface from wearting.

Hardwood floors with Hardwax Oil finish easily absord moisture and release it back into the air, thus helping to ensure a healthy atmosphere in the room.

BENEFITS

Effect of "Open" Pores. Along with wire brushing technique, Hardwax Oil finish emphasizes natural texture and beauty of oak. Pores appear "open", visually preserving the depth of texture and relief.

Repairability. Hardwax Oilfinish has a soft matte sheen, much like that of natural wood. Following finish renewal or re-waxing of the entire floor or worn-out areas, the sheen level temporarily increases, but returns to normal within a few days.

HARDWAX OIL COMBI

In Hardwax Oil Combi is an environmentally friendly wood flooring finish that consists of 2 layers:

Top layer is manufactured from specialized UV-cured oils that give finished surface increased durability and protection from possible mechanical damage.

Botton layer consists of wax oil created from natural oils and other components. The oil easily fills wood pores and saturates the wood, strengthening it from the inside, as well as protecting it from ill effects of moisture, dirt and most household chemicals. Hardwax Oil Combi surface finish has a gentle, silky matte sheen.

BENEFITS

Increased Wear-Resistance. Because Hadrwax Oil Combi consists of UV-cured oils and natural oils, this surface finish has considerable wear-resistance properties that are much higher than of traditional oil finishes.

Excellent Repairability. Finish repairs do not require disassembling or refinishing the entire surface. It is possible to perform quick spot repairs.

Superb Protection. Hardwax Oil Combi protects wood floors from ill effects of water and most household solvents and liquids (including coffee, wine etc.). High elasticity of the finish make it resistant to moisture and temperature fluctuations.

Coswick Flooring Finishes

Characteristics	Type of Flooring Finish						
	CosNanoTech+	Silk Oil	Hardwax Oil				
Class of materials	UV-cured polyurethane acrylates	UV-cured modified oil-acrylates	Organic oils and waxes, oxidative				
Surface type	Closed pores	Semi-closed pores, wire brushed	Open pores, wire brushed				
Gloss level	Semigloss or matte	Silk matte	Matte				
Wear-resistance	Very high	High	Medium				
Resistance to chemicals	Very high	Very high	High				
Care and Maintenance	Regular care	Regular care, restorative care, finish renewal	Regular care, restorative care, finish renewal				
Repairability	Low	Medium	High				
Range of Use	Residential and commercial	Residential and commercial	Residential and commercial				
Finish Warranty	25 year for residential, 35 year for residential (for commercial finish)	-	-				

FLOOR CARE PRODUCTS













1. Coswick Service Kit

is designed to clean solid and engineered wood floors that have a lacquer or oil finish. The kit includes a microfiber mop cloth and ready-to-use Coswick Hardwood Cleaner.

Microfiber mop cloth:

- Machine washable;
- Very effective against dust;
- · Highly absorbent and long lasting.

Ready-to-use Hardwood Cleaner:

- Perfect for regular cleaning of finished wooden floors;
- Excellent grease and dirt removing properties;
- · Non-abrasive, leaves no residue;
- Delicate scent.

2.1Cleaner for lacquered and UV-oiled hardwood floors

Cleaner is meant for regular care and maintenance of lacquered or UV-oiled wood flooring. Neutral pH ensures minimal risk of color changes, creates a protective film, extends protective properties of flooring finish.

0.5 litres per bottle.

Cleaner concentrate for lacquered and UV-oiled hardwood floors

Cleaner Concentrate is meant for regular care and maintenance of lacquered or UV-oiled wood flooring. Neutral pH ensures minimal risk of color changes, creates a protective film, extends protective properties of flooring finish. Dilute agent at ratio of 1:50 (10ml of concentrate per 0.5L of water).

2.2 Cleaner for natural oiled and Hardwax oiled hardwood floors

Cleaner is meant for regular care and maintenance of natural oiled and Hardwax oiled wood flooring. Neutral pH ensures minimal risk of color changes, creates a protective film, extends protective properties of flooring finish.

0.5 litres per bottle.

Cleaner concentrate natural oiled and Hardwax oiled hardwood floors

Cleaner Concentrate is meant for regular care and maintenance of natural oiled and Hardwax oiled wood flooring. Neutral pH ensures minimal risk of color changes, creates a protective film, extends protective properties of flooring finish. Dilute agent at ratio of 1:50 (10ml of concentrate per 0.5L of water).

3. Renewer oil for UV-oiled hardwood floors

Product is meant for surface renewal of hardwood floors with UV oil finish. Product creates a firm, elastic protective surface film. 0.75 litres per bottle.

4. Renewer oil for natural oiled and Hardwax oiled hardwood floors

Product is intended for recovering of hardwood floors with natural oil-wax finish. Product creates a thin, elastic, protective and water-repellent surface film. 1.0 litre per bottle.

5. Protective wax for hardwood floors

Product is intended for recovering of hardwood floors with natural oil, Hardwax or UV-oil finishes. Product creates a thin, elastic, protective and water-repellent surface film. 1.0 litre per bottle.

6. Tinted oil for restoration of natural oiled and Hardwax oiled hardwood floors

Product is meant for recovery and repair of hardwood floors with natural oil and Hardwax finishes. Product creates an elastic protective film on floor surface. 1.0 litre per bottle.

7. Heavy duty cleaner for hardwood floors

Coswick Heavy Duty Cleaner is meant for lacquered and oiled prefinished wood flooring. Recommended for removal glue spots just after installation and for removal any deep stain sport and marks during regular floor maintenance.

1.0 litre per bottle.

8. Coswick Stain

Coswick stains are designed for giving wood surfaces a desired color. 1.0 litre per bottle.

9. Coswick Wax Filler

Ready-to-use wax for quick repairs of small damages in floors with all types of finish. Wax filler is available in all Coswick colors.

MOLDINGS

Available in All Coswick Colors and Finishes			Solid plank flooring T&G	2-layer engineered T&G	
	Oak	Solid			
	Ash	Solid	β mm (2 mm) (3 mm) (3 mm) (4	[] S S S S S S S S S S	69 mm
Stair Nosing	American walnut	Solid	105 mm	105 mm	105 mm
	Oak	Solid			
	Ash	Solid	51 mm	SI mm	51 mm
Reducer	American walnut	Solid	31 11991		
	Oak	Solid			
	Ash	Solid	25 mm.	25 mm Z2 mm	
Carpet Reducer	American walnut	Solid	50 mm	50 mm	
	Oak	Veneer		68 mm	
	Ash	Veneer		o www	
Baseboard №7	American walnut	Veneer		58 mm	
	Oak	Veneer		100 mm	
	Ash	Veneer			
Baseboard №8	American walnut	Veneer		90 mm	



