






SPC Flooring

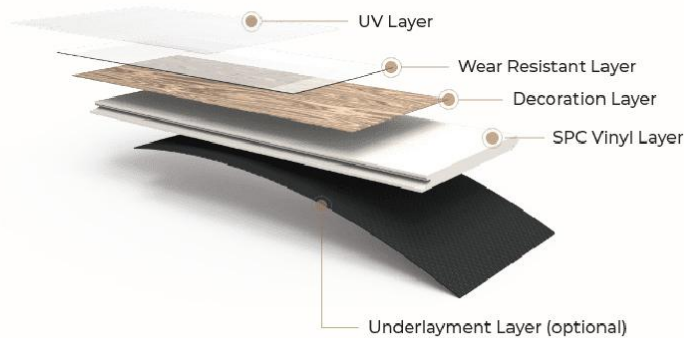

General Specification



SPC Flooring
1500*230*4.2+1mm



Herringbone Flooring
630*126*4.2+1mm

Factors



100% WATERPROOF



STAIN RESISTANT



EASY MAINTENANCE



FAMILY FRIENDLY



ECO-FRIENDLY



SCRATCH RESISTANT



EASY TO INSTALL




INSTALL ANYWHERE
IN YOUR HOME


SPC Flooring




RW1001-21019-5

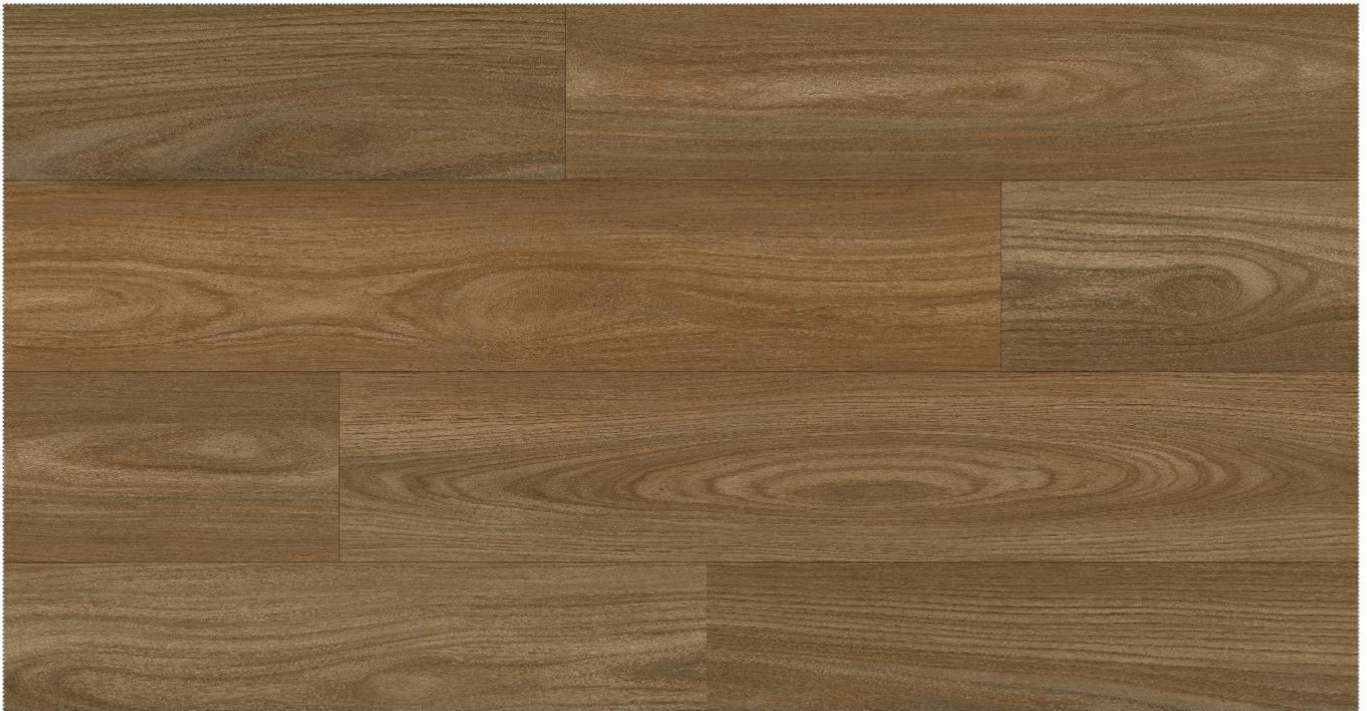

RW1002-21019-3

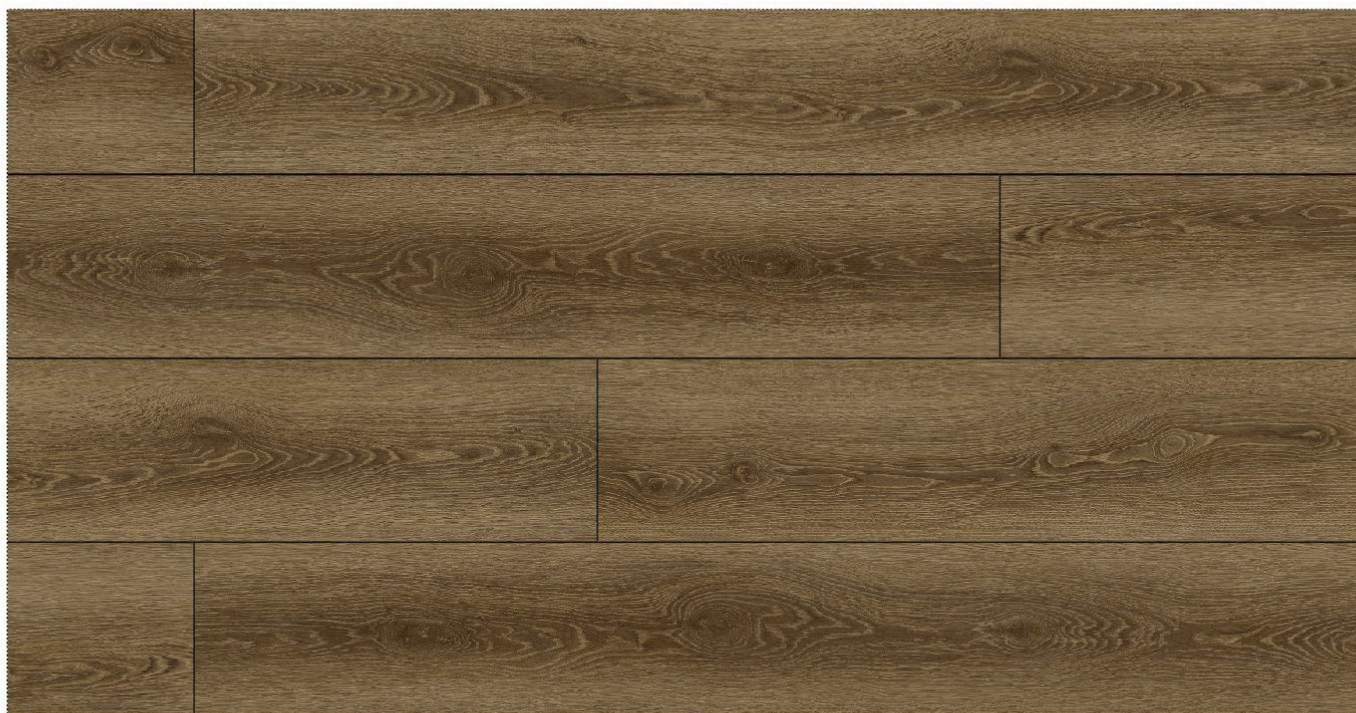

RW1003-972-7

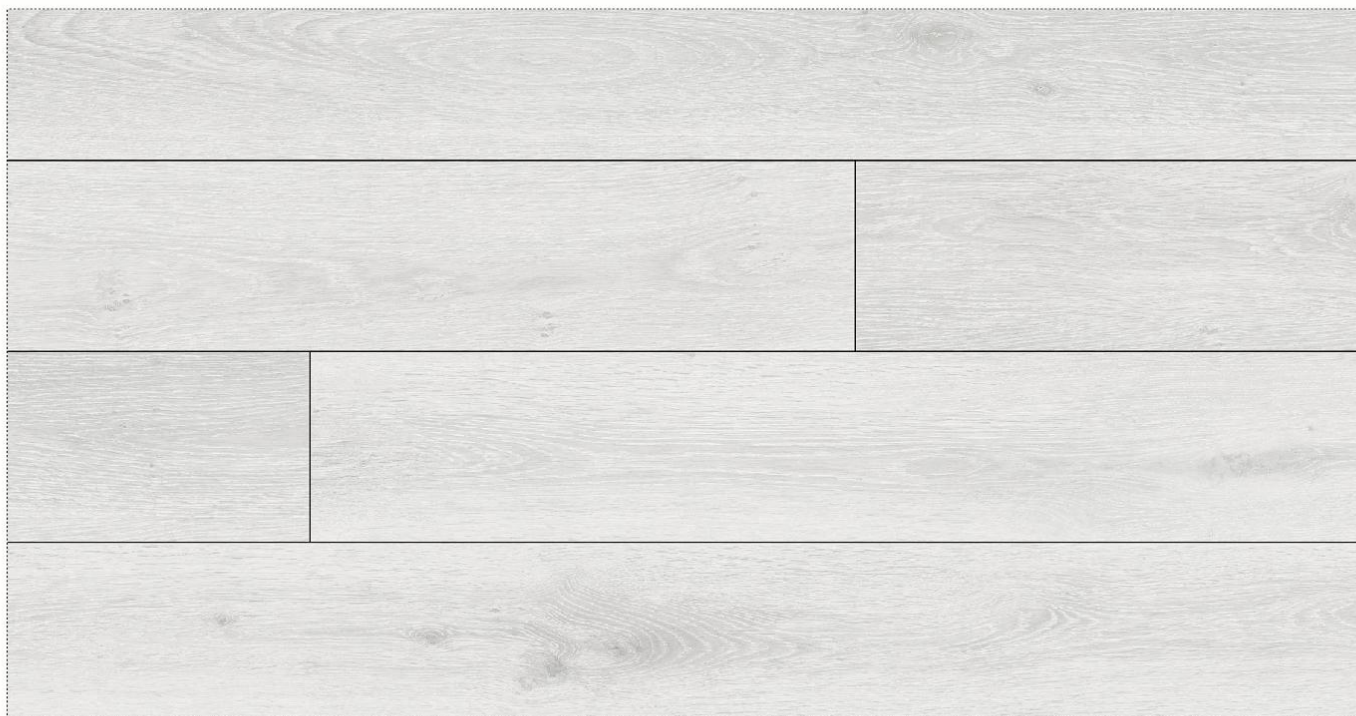

RW1004-926-3

Accessories



WPC Skirting 80
2400 x 80 x 12mm



T-moulding
2400 x 45 x 6mm



Reducer
2400 x 45 x 6mm





RW1005-926-10



RW1006-901-15

SPC Flooring




RW1007-6057-20



RW1008-926-7



RW1009-929-5

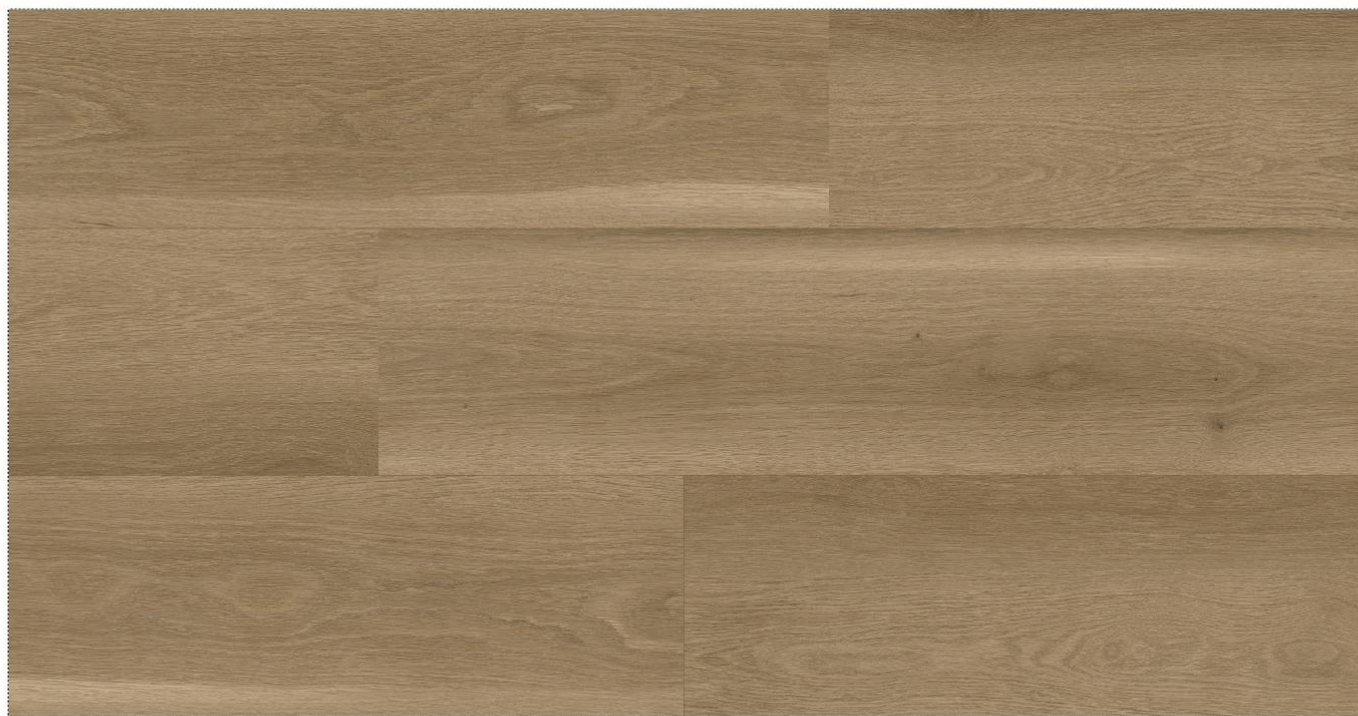

RW1010-2485-2

SPC Flooring



RW1011-904-3



SPC Benefits

100% Water Proof

100% Virgin Materials

100% Free of Toxic Hazardous Materials Which Is Safe for Your Health

Fire & Burning Resistance

Highest Impact Resistance

Highest Dimensional Stability In Front of High & Low Temperature

Commercial & Industrial Heavy Resistance

Easy to Install

Reduce Noise

Super Scratches Resistance

Slip Resistance

Castor Chair Resistance

Embossing In Register

Micro bevel

High Light Fastness

Stain Resistance

Thechnical Data Sheet

Item	EN Norms	Result	ASTM Norms	Result	Remark
Size	EN 427	1500X230 mm	ASTM F536	1500X230 mm	Pass
Dimension Squareness and Straightness	EN 427	Squareness:0.18mm			Pass
		Straightness:0.07mm			Pass
Chemical Resistance	EN 423	Pass	ASTM F925	Pass	available upon request
Color Fastness to Artificial light	EN 20105:B02 method A	Pass, >=Grade6	ASTM F1515	Pass	available upon request
Wear Resistance	EN 660-1	Weargroup: T			available upon request
Resistant to impact			ASTM F1265	Pass	available upon request
Dimensional Stability	E434	Pass	ASTM F1700	Pass,	
Residual Indentation	EN 433	Pass	ASTM F970	Pass	
Slip Resistance	EN 13893	Class DS			
Behaviour to Fire	EN 13501-1	Bf1-S1	ASTM E648-06	Pass/Class 1	
Smoke Density			ASTM E662	Pass, <=450	

Specifications

Length x Width(mm)	1500X230	overall thickness(mm)	5.2	Wearlayer(mm)	0.3
Gloss level	≤3	Virgin materials	Yes	bevel edges on 4 sides	N
UV matt coating	Yes	Floating installation	Yes	Click system	Unilin
Pieces/Carton	6	Square Meter./ Carton(m2)	2.070	Weight kgs/ Piece	3.57
Cartons/pallet	45	Square Meter./ Pallet	93.15	Weight kgs/ Carton	36.19
Pallets /20'GP	20	Square Meter/ Container	1863.00	Weight kgs/ pallet	1649.14

Herringbone Flooring



RW2001-6057-20



RW2002-972-4



RW2003-926-3



RW2004-220506-1

Thechnical Data Sheet

Item	EN Norms	Result	ASTM Norms	Result	Remark
Size	EN 427	630X126 mm	ASTM F536	630X126 mm	Pass
Dimension Squareness and Straightness	EN 427	Squareness:0.15mm			Pass
		Straightness:0.09mm			Pass
Chemical Resistance	EN 423	Pass	ASTM F925	Pass	available upon request
Color Fastness to Artificial light	EN 20105:B02 method A	Pass, >=Grade6	ASTM F1515	Pass	available upon request
Wear Resistance	EN 660-1	Weargroup: T			available upon request
Resistant to impact			ASTM F1265	Pass	available upon request
Dimensional Stability	E434	Pass	ASTM F1700	Pass,	
Residual Indentation	EN 433	Pass	ASTM F970	Pass	
Slip Resistance	EN 13893	Class DS			
Behaviour to Fire	EN 13501-1	Bf1-S1	ASTM E648-06	Pass/Class 1	
Smoke Density			ASTM E662	Pass, <=450	

Specifications

Length x Width(mm)	630X126	overall thickness(mm)	5.2	Wearlayer(mm)	0.3
Gloss level	≤3	Virgin materials	Yes	bevel edges on 4 sides	N
UV matt coating	Yes	Floating installation	Yes	Click system	Valinge 5GI
Pieces/Carton	24	Square Meter./ Carton(m2)	1.905	Weight kgs/ Piece	0.82
Cartons/pallet	54	Square Meter./ Pallet	102.88	Weight kgs/ Carton	8.67
Pallets /20'GP	20	Square Meter/ Container	2057.53	Weight kgs/ pallet	488.88

